
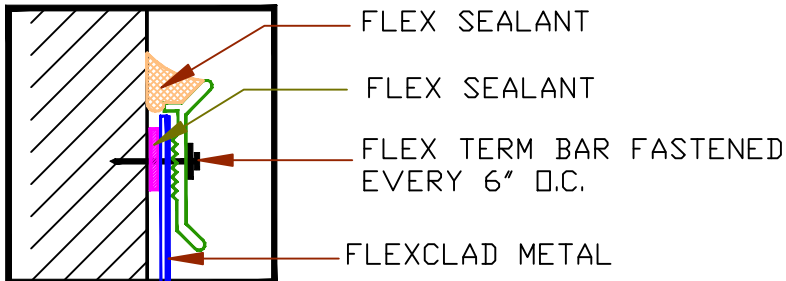


**NOTES:**

- 1) SEALANT IS A TWO STEP APPLICATION:
  - A) BEHIND TOP OF FLEX FLASHING.
  - B) AT TOP OF FLEX TERM BAR.

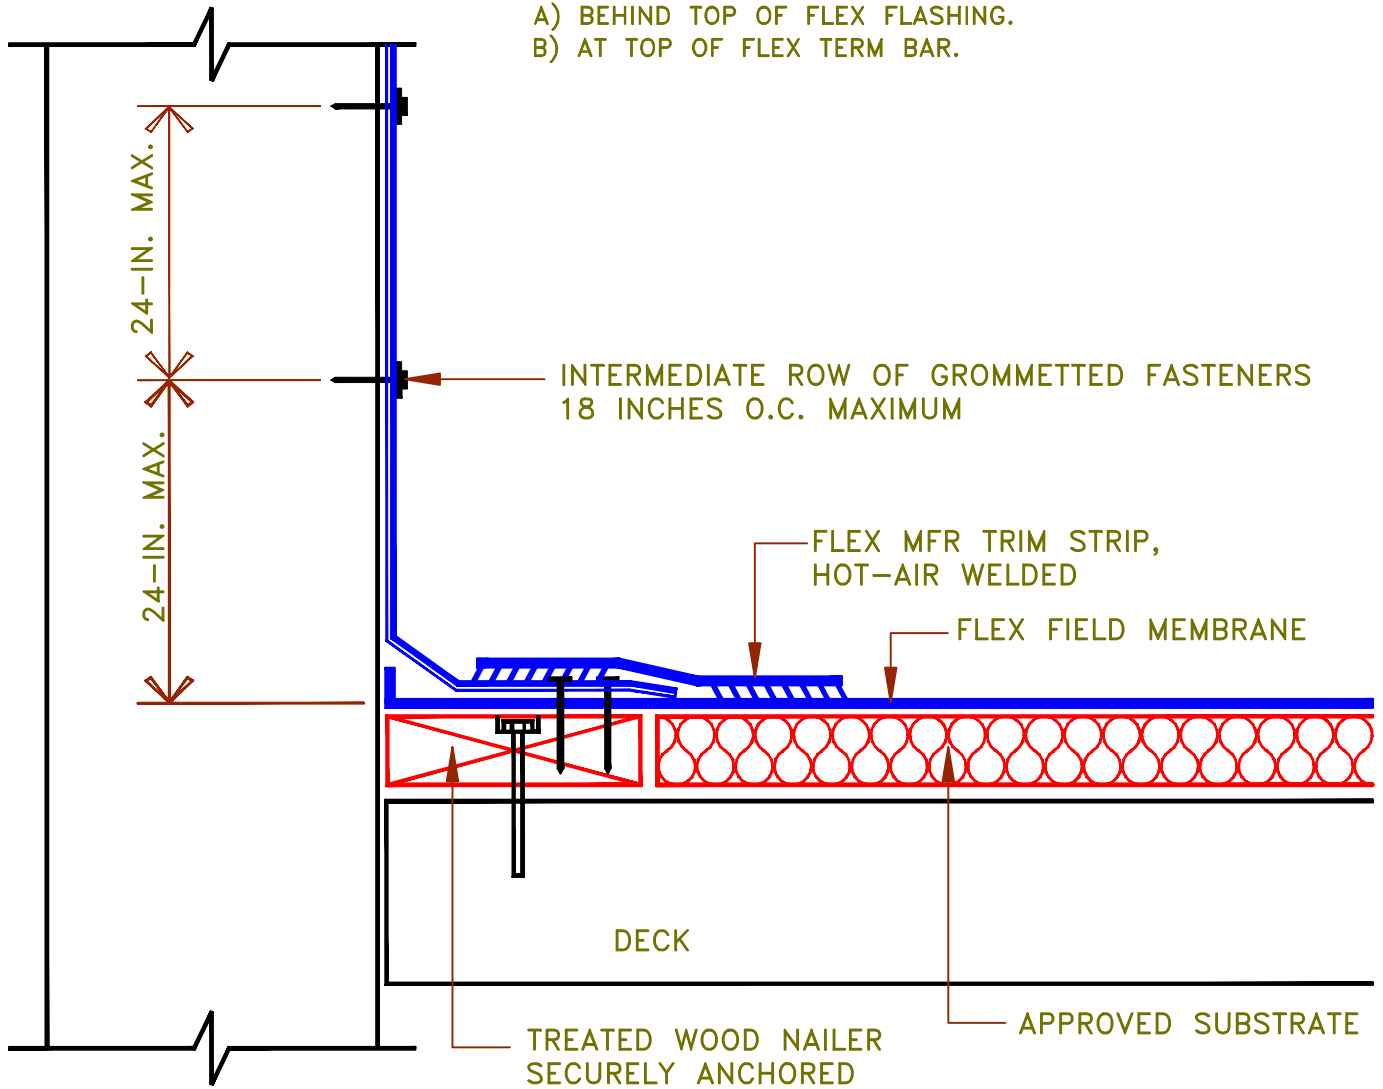

WALL FLASHING WITH FLEXCLAD METAL	
NAME	DETAIL NO. 2.70
DRAWN BY:	DATE:
SK	1/2017
APPLICABLE TO ALL FLEX	
ADHERED ROOFING SYSTEMS	
FLEX MEMBRANE INTERNATIONAL	2670 LEISCZ'S BRIDGE RD. LEESPORT, PA 19533 800-969-0108 FlexRoofingSystems.com