


MINIMUM 1-1/2" (40 mm)  
HOT AIR WELD

FLEX TPO  
REINFORCED  
MEMBRANE

FLEX TPO CUT-EDGE  
SEALANT REQUIRED ONLY  
ON NON-FACTORY  
AND CUT EDGES.

APPROVED  
SUBSTRATE

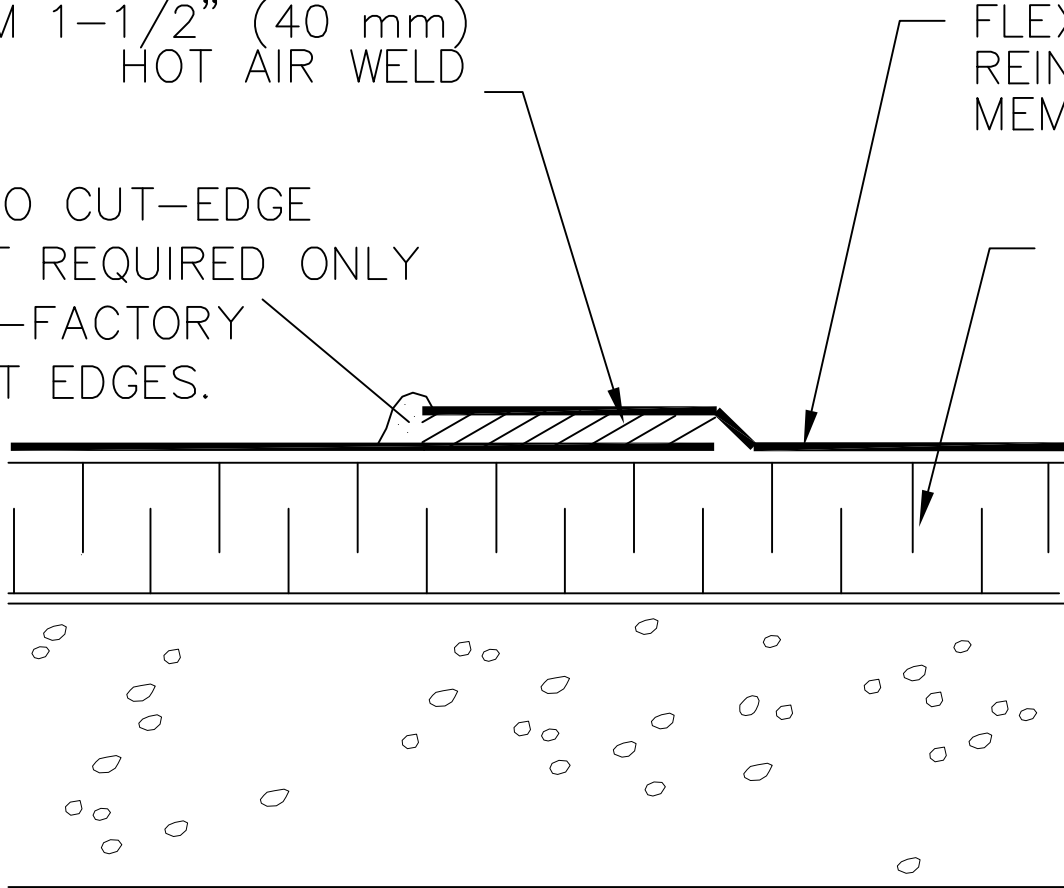

NOTE:

APPROXIMATELY 1/8" (3 mm) DIAMETER BEAD OF CUT-EDGE SEALANT IS REQUIRED ON CUT EDGES OF FLEX TPO REINFORCED MEMBRANE.

TITLE	
ENDLAP CROSS SECTION	
NAME	
DETAIL NO. 2.20	
DRAWN BY:	DATE:
SK	8/2012
APPLICABLE TO ALL FLEX TPO	
MECHANICALLY FASTENED SYSTEMS	
FLEX MEMBRANE INTERNATIONAL	2670 LEISCZS BRIDGE RD. LEESPORT, PA 19533 800-969-0108 FlexRoofingSystems.com